



3 conductors shown

Conductor:
8 AWG. Thru 2 AWG. compact round concentric lay class "B" stranded copper

Insulation:
Cross-linked Polyethylene (XLPE)

Colour Coding:
Black, white

Jacket:
Polyvinyl Chloride (PVC), black


Bonding Conductor (Ground):
10 AWG thru 6 AWG one(1) bare compact round concentric lay class "B" stranded copper

Print:
NORTHERN CABLES™ #/C SIZE (AWG)
CMPT CU. NMWU XLPE 300V FT1 SR CSA
METRE MARK

Applications:
For exposed and concealed wiring in dry, wet and in Category 1 and 2 locations where not exposed to mechanical injury.
For exposed wiring where subjected to the weather.
For direct earth burial (with protection as required by inspection authority).

Features:
Rated at 60°C wet dry
Rated at -25°C
Sun Res

Compliances:
Industry compliances: CSA Standard C22.2 No. 48
Flame test compliances: CSA FT1

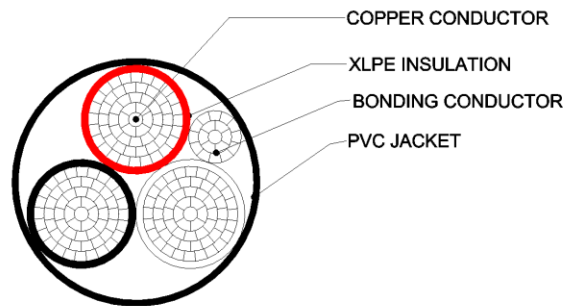

3 conductors shown

PART NO.	NO OF COND.	COND. SIZE (AWG/k cmil)	GROUND WIRE SIZE (AWG)	MIN. AVG. INSULATION THICKNESS		NOMINAL DIAMETER (OVER)				NET WEIGHT
						INSULATION		JACKET		
				INCHES	mm	INCHES	mm	INCHES	mm	KG/KM
801450	2	8	10	0.075	1.91	0.584	14.83	0.679	17.25	345
801452	2	6	10	0.090	2.29	0.711	18.06	0.806	20.47	485

DIMENSIONS AND WEIGHTS ARE NOMINAL; SUBJECT TO INDUSTRY TOLERANCES